


# SWING



Costruzione	Konstrukcja	Construction	Herstellungsverfahren
Tufting riccio SDN 1/10	Taftowa SDN 1/10	Tufted loop 1/10	Getufted Schlinge 1/10
Composizione	Skład	Pile Composition	Polnutzschicht
100% poliammide SDN	100% poliamid SDN	100% polyamid SDN	100% Polyamid SDN
Sottofondo	Podkład	Secondary backing	Rückenausrüstung
Juta sintetica	Juta syntetyczna	Synthetic jute	SDR Textilrucken
Punti al m <sup>2</sup>	Punkty na m <sup>2</sup>	Stitches per sqm	Knoten m <sup>2</sup>
193 550	193 550	193 550	193 550
Altezza pelo	Wysokość włókna	Pile height	Polhöhe
4 mm	4 mm	4 mm	4 mm
Altezza totale	Wysokość całkowita	Total height	Gesamtdicke
6 mm	6 mm	6 mm	6 mm
Peso della fibra	Waga włókna	Surface yarn weight	Polgewicht
520	520	520	520
Peso totale	Waga całkowita	Total weight	Gesamtgewicht
1 630	1 630	1 630	1 630
Larghezza rotolo	Szerokość rolki	Roll width	Breite
400 i 500 cm	400 i 500 cm	400 i 500 cm	400 i 500 cm
DOP 1008-122468	DOP 1008-122468	DOP 1008-122468	DOP 1008-122468

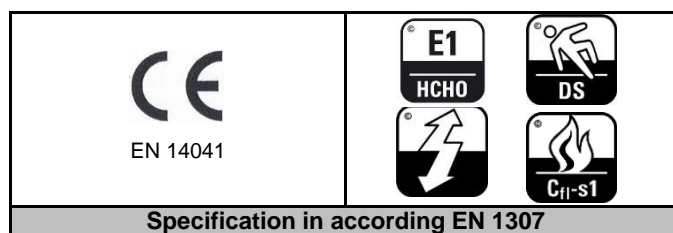

	5 (EN ISO 105-B02)	<sup>2</sup> K/W)	
	25 dB		

RESISTENZA WEARABILITY - STRAPAZIERWERT				COMFORT COMFORT KOMFORT - KOMFORTWERT			
estrema extreme extremalna extrem	elevata high wysoka stark	normale good dobra normal	sufficiente normal normalna gering	medio medium einfach	buono good dobry gut	alto very good bardzo dobry hoch	ottimo excellent wysoki